

# Multi-channel loading magazine

## PROFimat

---

### Multi-channel loading magazine

#### Application area:

- Ideal for small and medium-sized batches

#### Properties:

- Extremely short changeover time at the touch of a button
- Optimal running characteristics: 6 or 8 guide channels, heavy net weight
- Extremely smooth running, hydrodynamic bearing, 360° closed guide channels
- High degree of operating comfort thanks to a 14.5-cm (5.7") graphic touch display
- Process-reliable supply of rotationally symmetrical profile material


#### Working range:

- Round material, diameters from 5 to 130 mm
- Bar length 3200 mm, 4200 mm and 6200 mm (10,000 mm)


#### Special features:

- Easy replacement of the spindle liner tubes thanks to axial slide of the magazine (optionally radial swivel-out)
- Process-integrated remnant disposal through the machine (optionally by the magazine)
- Machine-protecting, vibration-absorbing design

LED strip light indicates the operating status

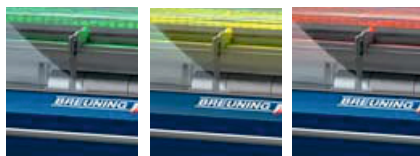

Automatic mode    Reloading cycle    Fault



The cover made from special glass provides a view of what is happening in the loading magazine. The cover can be opened for service purposes..



POWER TURNING



## PROFImat

---

PROFImat – Layout plans upon request



**Kurt Breuning**  
**IRCO Maschinenbau GmbH**



Im Maurer 15  
71144 Steinenbronn  
DEUTSCHLAND  
Fon: +49 7157 52860  
Fax: +49 7157 528655  
[technologie@breuning-irco.de](mailto:technologie@breuning-irco.de)  
[breuning-irco.de](http://breuning-irco.de)