

Multi-channel loading magazine

ecoPROFI

Multi-channel loading magazine

Application area:

- Ideal for small and medium-sized batches

Properties:

- Extremely short changeover time at the touch of a button
- Optimal running characteristics: 3 to 6 guide channels, heavy net weight
- Extremely smooth running, hydrodynamic bearing, 360° closed guide channels
- High degree of operating comfort thanks to a 14.5-cm (5.7") graphic touch display
- Prozesssichere Zuführung von rotationssymmetrischem Profilmaterial
- Suitable for long turners (optional) electronic synchronizing device, optimal material guidance up to the clamping device with a telescopic system
- Easy conversion from long to short turning mode at the touch of a button


Working range:

- Depending on the selected model, material diameters between 5 and 51 mm
- Bar length 3200 mm, 4200 mm and 6200 mm


Special features:

- Easy replacement of the spindle liner tubes thanks to axial slide of the magazine (optionally radial swivel-out)
- Process-integrated remnant disposal through the machine (optionally by the magazine)
- Machine-protecting, vibration-absorbing design

LED strip light indicates the operating status

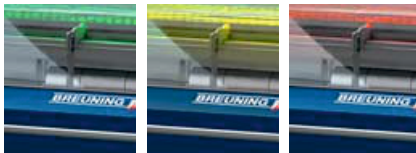

Automatic mode Reloading cycle Fault

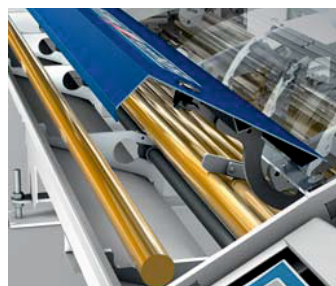

The specially designed tailboard allows reloading of the bar stock



POWER TURNING



ecoPROFI

ecoPROFI - Layout plans upon request



Kurt Breuning
IRCO Maschinenbau GmbH



Im Maurer 15
71144 Steinenbronn
DEUTSCHLAND
Fon: +49 7157 52860
Fax: +49 7157 528655
technologie@breuning-irco.de
breuning-irco.de